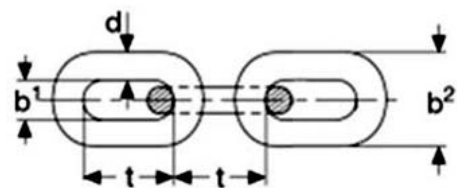


Řetěz polodlouhý článek A, DIN 5685A pozink


kód	d	tol.	t	b1	b2	nosnost kg	cívka / m	Kg /100m
7701.02	2	±0,1	12	3,5	8	40	100	6,5
7701.03	3	±0,2	16	5,5	12	80	60	16,0
7701.04	4	±0,2	19	7,5	16	150	50	28,0
7701.05	5	±0,3	21	9,5	20	250	40	46,0
7701.06	6	±0,3	24	11,0	24	350	30	68,0
7701.07	7	±0,4	28	13,0	28	450	20	95,0
7701.08	8	±0,4	32	15,0	32	630	15	120,0
7701.10	10	±0,5	40	18,0	40	950	10	190,0