


Řetěz kroucený, DIN / 5685A pozink

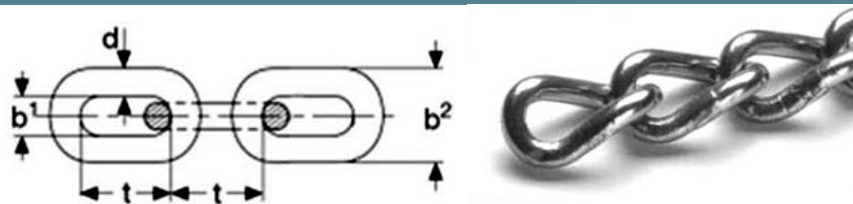

kód	d	tol.	t	b1	b2	nostnost kg	cívka / m	Kg /100m
7704.03	3	±0,2	15,0	5	11,5	70	60	16
7704.04	4	±0,2	17,5	6	15,0	120	50	28
7704.05	5	±0,3	19,5	7	18,0	200	40	46
7704.06	6	±0,3	22,0	9	22,0	300	30	68
7704.08	8	±0,4	29,0	12	30,0	500	15	120