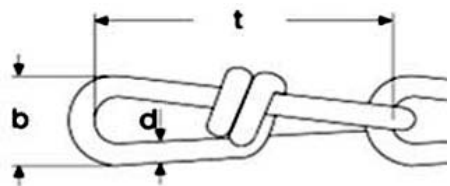


Řetěz uzlovaný DIN5686 pozink


kód	d	tol.	t	b	nosnost kg	cívka / m	Kg /100m
7708.14	1,4	±0,1	20	6,5	10	120	3,8
7708.16	1,6	±0,1	22	7,0	20	90	4,6
7708.18	1,8	±0,1	25	8,0	30	90	6,2
7708.20	2,0	±0,1	28	9,0	40	60	7,5
7708.22	2,2	±0,1	31	10,0	50	60	9,5
7708.25	2,5	±0,1	35	11,0	65	30	12,5
7708.28	2,8	±0,2	39	13,0	80	30	15,5
7708.31	3,1	±0,2	40	14,0	100	30	18,0
7708.34	3,4	±0,2	44	15,0	120	30	22,0
7708.38	3,8	±0,2	46	17,0	150	30	28,0
7708.42	4,2	±0,2	50	19,0	180	30	36,0