


### Řetěz ozdobný hodinový

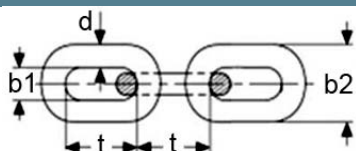

| kód      | d   | b2  | t   | nostnost kg | cívka / m | Kg /100m |
|----------|-----|-----|-----|-------------|-----------|----------|
| 7815.10M | 1,0 | 4,5 | 6,5 | 5           | 50        | 2,000    |
| 7815.10N | 1,0 | 4,5 | 6,5 | 5           | 50        | 2,000    |
| 7815.12M | 1,2 | 5,0 | 7,0 | 6           | 50        | 2,700    |
| 7815.12N | 1,2 | 5,0 | 7,0 | 6           | 50        | 2,700    |
| 7815.16M | 1,6 | 6,0 | 8,0 | 8           | 25        | 5,000    |
| 7815.16N | 1,6 | 6,0 | 8,0 | 8           | 25        | 5,000    |

povrch: N - poniklovaný, M - pomosazený